

# 膜付グロメット KG-SG




## 仕様・用途

仕様 材質 EPDM=黒

硬度 50° ±5

用途 配電盤・制御盤・計測機器等

◎ 受注ロットは100ヶ単位になります。

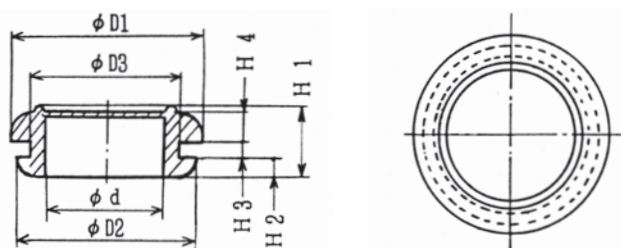

## 膜付グロメット KG-SG

5825番号	旧 番号	H1	H2	H3	H4	φD1	φD2	φD3	φd	重量(g)	F 番号	備考
KG-SG09B	SG-9A	8.5	2.0	2.3	3.5	16.0	13.0	9.0	4.5	1.1	SG-9F	
KG-SG12B	SG-12A	6.3	1.5	1.6	2.5	19.0	16.0	12.0	7.0	2.0	SG-12F	
KG-SG14B	SG-14A	8.0	2.0	2.3	3.0	21.0	18.0	14.0	9.0	2.0	SG-14F	
KG-SG16B	SG-16A	8.1	2.0	1.6	3.5	23.0	20.0	15.0	11.0	2.8	SG-16F	
KG-SG18B	SG-18A	8.8	2.0	2.3	3.5	25.0	22.0	18.0	12.0	3.5	SG-18F	
KG-SG20B	SG-20A	9.1	2.5	1.6	4.0	27.0	24.0	20.0	15.0	4.3	SG-20F	
KG-SG22B	SG-22A	9.8	2.5	2.3	4.0	29.0	26.0	22.0	17.0	3.8	SG-22F	
KG-SG24B	SG-24A	11.3	3.0	2.3	5.0	31.0	28.0	24.0	19.0	6.3	SG-24F	
KG-SG26B	SG-26A	12.2	3.0	3.2	5.0	35.0	31.0	26.0	19.0	8.8	SG-26F	
KG-SG28B	SG-28A	11.8	3.0	2.3	5.0	37.0	33.0	28.0	21.0	9.3	SG-28F	
KG-SG30B	SG-30A	12.7	3.0	3.2	5.0	39.0	35.0	30.0	23.0	9.8	SG-30F	
KG-SG32B	SG-32A	11.8	3.0	2.3	5.0	41.0	37.0	32.0	25.0	9.5	SG-32F	
KG-SG34B	SG-34A	12.7	3.0	3.2	5.0	43.0	39.0	34.0	27.0	10.9	SG-34F	
KG-SG36B	SG-36A	13.8	4.0	2.3	6.0	45.0	42.0	36.0	28.0	13.0	SG-36F	
KG-SG38B	SG-38A	14.7	4.0	3.2	6.0	48.0	44.0	38.0	30.0	14.5	SG-38F	
KG-SG42B	SG-42A	14.7	4.0	3.2	6.0	52.0	48.0	42.0	34.0	15.7	SG-42F	
KG-SG46B	SG-46A	15.0	4.0	3.5	6.0	56.0	51.0	46.0	36.0	—	—	
KG-SG50B	—	13.7	4.0	3.2	6.5	60.0	55.0	50.0	40.0	20.3	SG-50F	
KG-SG54B	SG-54A	15.0	4.0	3.5	6.0	64.0	59.0	54.0	44.0	—	—	
KG-SG58B	SG-58A	15.0	4.0	3.5	6.0	68.0	63.0	58.0	48.0	—	—	
KG-SG60B	—	13.7	4.0	3.2	6.5	70.0	65.0	60.0	50.0	20.7	SG-60F	
KG-SG70B	—	13.7	4.0	3.2	6.5	80.0	75.0	70.0	60.0	30.3	SG-70F	
KG-SG80B	—	14.2	4.5	3.2	6.5	90.0	85.0	80.0	70.0	—	SG-80F	
KG-SG100B	—	16.7	5.0	3.2	7.0	110.0	105.0	100.0	90.0	58.0	SG-100A	
KG-SG120B	SG-120A	17.2	5.0	4.0	7.5	130.0	125.0	120.0	110.0	—	—	